



## PRODUCT DRAWING

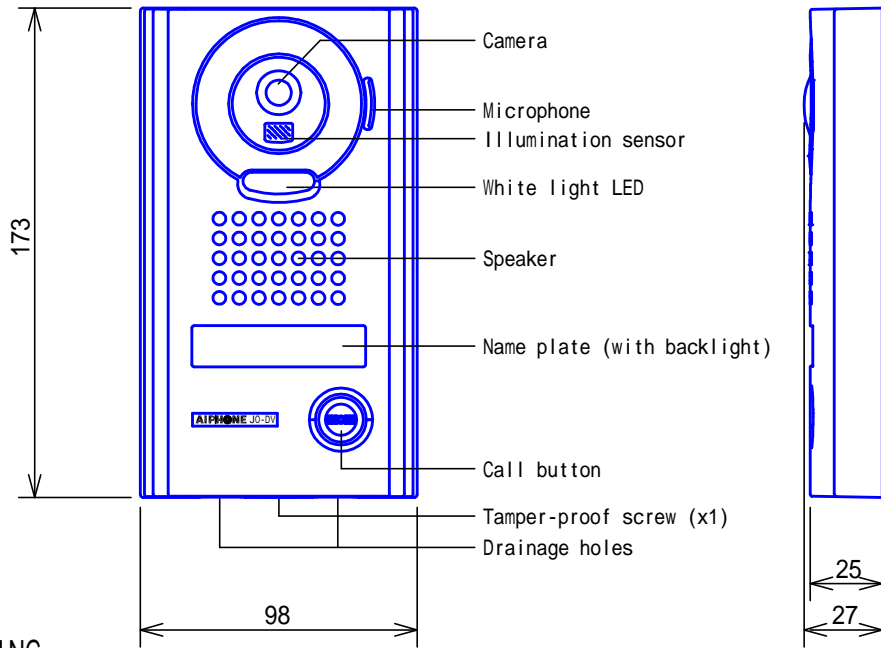

## MOUNTING

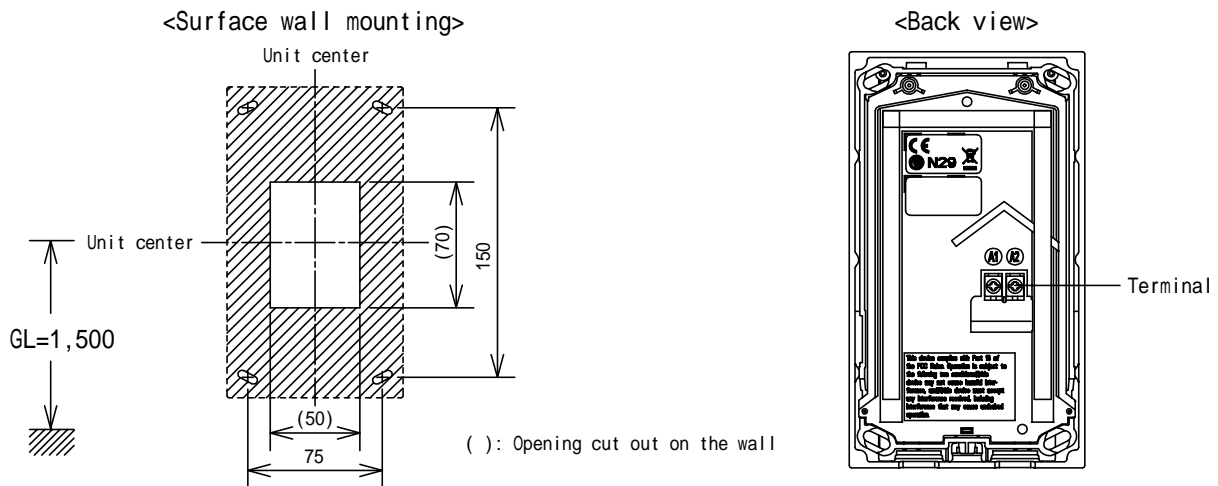


## SPECIFICATIONS

|                       |   |  |  |  |
|-----------------------|---|--|--|--|
| Power source          | Supplied from Master monitor station or Expansion monitor station       |  |  |  |
| Type of communication | Open voice hands-free communication                                     |  |  |  |
| Camera                | 1/4 inch color CMOS   |  |  |  |
| Minimum illumination  | 5 lux (approx.)   |  |  |  |
| Ambient temperature   | -20 ~ +60   |  |  |  |
| Mounting              | Surface wall mount (Directly to wall or electrical box)                 |  |  |  |
| Electrical box        | Single-gang box   |  |  |  |
| Material              | Front panel: Zinc diecasting. Main unit: Flame resisting PC + ABS resin |  |  |  |
| Weight                | 650g (approx.) (1.43 lbs)   |  |  |  |
| Unit color            | Front panel: Solid silver   |  |  |  |
| IP rating             | IP54  |  |  |  |
| IK rating             | IK08  |  |  |  |

|  |                                     |             |                       |
|--|-------------------------------------|-------------|-----------------------|
| DESCRIPTION<br>VIDEO DOOR STATION<br>(Color, Vandal-resistant) | FIG. NAME<br>PRODUCT/SPECIFICATIONS | UNIT<br>mm  | DATE<br>10 June, 2013 |
| MODEL NO.<br>JO-DV   | FIG.NO.<br>59284-1-2                | PAGE<br>1/2 | REVISION<br>1         |

**AIPHONE**


## WIRING DIAGRAM

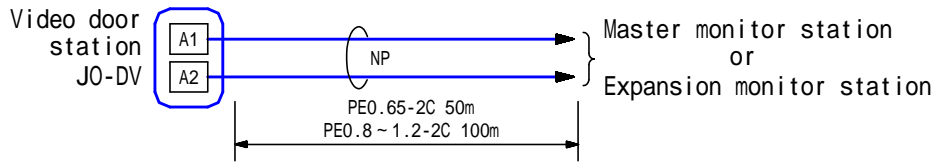


## IMAGE VIEW AREA & MOUNTING HEIGHT

Camera angle straight forward position

Vertical

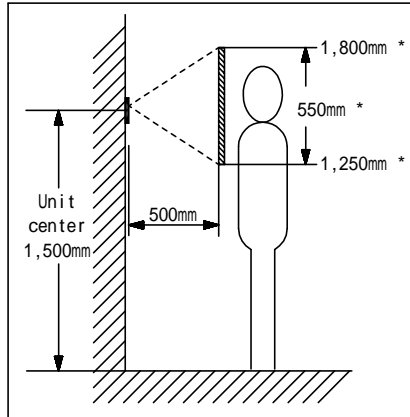

Horizontal




\* The figures are approximate.

## RESTRICTIONS


Do not have rain escape openings on bottom covered with caulking seals.

JO-DV door station is exclusively used for JO Series.


Avoid installing JO-DV door station in the following locations;



At the entrance where background is sky in upper floors of building, etc.



The background of the standing caller's is white wall.



Where the standing location is strongly sunlit.

## FUNCTIONS

Initiating a call to and entering communication with Master monitor station or Expansion monitor station.

Name plate is backlit constantly.

White light LED turns on during low-light conditions when monitoring and talking status.

|                                   |                              |                                       |             |                       |
|-----------------------------------|------------------------------|---------------------------------------|-------------|-----------------------|
| DESCRIPTION<br>VIDEO DOOR STATION | (Color,<br>Vandal-resistant) | FIG. NAME<br>WIRING/IMAGE/RESTR./FCN. | UNIT<br>mm  | DATE<br>10 June, 2013 |
| MODEL NO.<br>JO-DV                |                              | FIG.NO.<br>59284-2-2                  | PAGE<br>2/2 | REVISION<br>1         |
|                                   |                              |                                       |             | <b>AIPHONE</b>        |