


■PRODUCT DRAWING

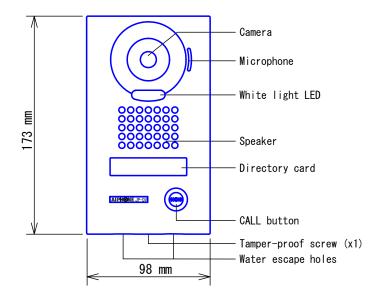




MOUNT ING

<Surface wall mounting>







■ SPECIFICATIONS

| ■ SFLUII IUATIUNS | | | | | | | |
|--------------------------------------|-------------------|---------------------------------------------------------|------|-----------------|---------|--|--|
| Power source | Supplied | Supplied from Master station | | | | | |
| Type of communication | Open voic | Open voice hands-free communication | | | | | |
| Camera | 1/4" colo | 1/4" color CMOS | | | | | |
| Minimum illumination | 5 Lux | | | | | | |
| Camera angle | Wide: 170 | Wide: 170° (approx.) (Horizontal) | | | | | |
| Ambient temperature | -10 ~ 60°€ | -10∼ 60°C | | | | | |
| Mounting | Surface w | Surface wall mount (Directly to wall or electrical box) | | | | | |
| Electrical box | Single-ga | Single-gang box | | | | | |
| Housing | Front pan | Front panel: Zinc diecasting | | | | | |
| Weight | 650g (app | 650g (approx.) | | | | | |
| Unit color | Front pan | Front panel: Solid silver | | | | | |
| IP rating | IP54 | IP54 | | | | | |
| IK rating | IK08 | IK08 | | | | | |
| DESCRIPTION (Cold | | FIG. NAME | | UNIT | DATE | | |
| VIDEO DOOR STATION Vandal-resistant) | | PRODUCT/SPECIFICATIONS mm | | 6 October, 2014 | | | |
| MODEL NO. | | FIG. NO. | PAGE | REVISION | AIBUANE | | |
| JP-DV | | 59734-1-3 | 1/3 | 1 | AIPHONE | | |

■WIRING DIAGRAM




■ IMAGE VIEW AREA & MOUNTING HEIGHT

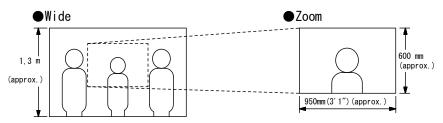


- Objects appear smaller due to greater distortion in the surrounding sections compared to the central section, but a wider area is displayed.
- Image view area depends on the camera zoom position.

●Wide


Vertical



Mounting height 1,3 m





Horizontal





An area over a range of approx. 170° in a 500mm(20") radius from the camera displays. (The display range is a rough estimation and may change due to the installation environment.)


Zoom(Mounting height: 1,5 m)
















| | | | | 330 IIIII (approx.) | | | |] |
|--------------|--------|-------------------|-----------|---------------------|------|----------|------------|--------------|
| DESCRIPTION | | (Color, | FIG. NAME | | | UNIT | DATE | |
| VIDEO DOOR S | TATION | Vandal-resistant) | WIRING | DIAGRAM/I | MAGE | mm | 6 October, | 2014 |
| MODEL NO. | | | FIG. NO. | | PAGE | REVISION | | ~ A A |
| JP-DV | | | 59734- | 2–3 | 2/3 | 1 | AIPH(| O R |

■RESTRICTIONS


- Do not cover the water escape holes with caulking seals.
- JP-DV door station is exclusively used with JP Series.
- Avoid to install JP-DV in the following locations;



At the Entrance where background is sky in upper floors of Condominiums, etc.



The background of the standing caller's is white wall.



Where the standing location is strongly sunlit.

■FUNCTIONS

• Initiating a call to and entering communication with Master station

| DESCRIPTION | (Color, | FIG. NAME | | UNIT | DATE |
|--------------------|-------------------|------------------|---------|----------|-----------------|
| VIDEO DOOR STATION | Vandal-resistant) | RESTRICTIONS/FUN | ICTIONS | mm | 6 October, 2014 |
| MODEL NO. | | FIG. NO. | PAGE | REVISION | AIRHANE |
| JP-DV | | 59734-3-3 | 3/3 | 1 | AIPHONE |