

# ■PRODUCT DRAWING

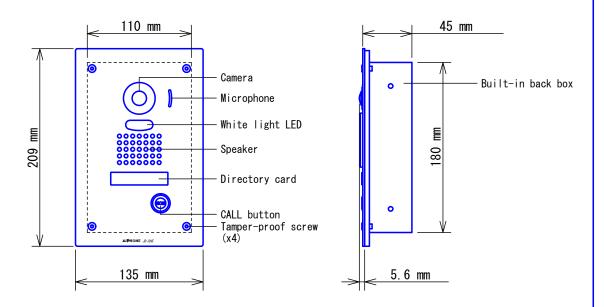

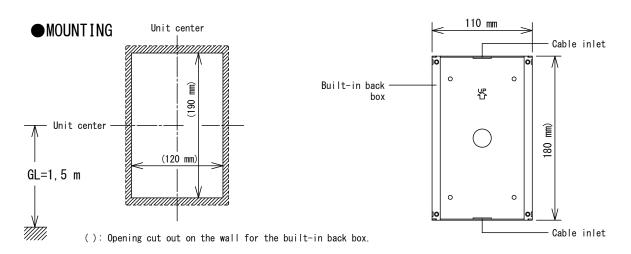

### ■ SPECIFICATIONS


JP-DVF

■31 LOTI TOATTONS							
Power source	Supplied	Supplied from Master station					
Type of communication	Open voic	Open voice hands-free communication					
Camera	1/4 inch	1/4 inch color CMOS					
Minimum illumination	5 Lux	5 Lux					
Camera angle	Wide: 170	Wide: 170° (approx.) (Horizontal)					
Ambient temperature	-10 <b>~</b> 60°€	-10∼ 60°C					
Mounting	Flush mou	Flush mount					
Electrical box	Not used	Not used (Mounts on built-in back box.)					
Housing	Front pan	Front panel: Stainless steel.					
Weight	570g (app	570g (approx.), back box 450g (approx.)					
Unit color	Stainless	Stainless steel, vertical hair-line processed.					
IP rating	IP54	IP54					
IK rating	IK08	IK08					
DESCRIPTION (Cold		FIG. NAME		UNIT	DATE		
VIDEO DOOR STATION Vand	al-resistant)	PRODUCT/SPECIF	[CATIONS	mm	6 October, 2014		
MODEL NO.		FIG. NO.	PAGE	REVISION	AIRHANE		


59745-1-3

1/3

### ■WIRING DIAGRAM



# ■ IMAGE VIEW AREA & MOUNTING HEIGHT

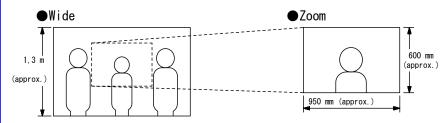

- Objects appear smaller due to greater distortion in the surrounding sections compared to the central section, but a wider area is displayed.
- Image view area depends on the camera zoom position.

#### ●Wide

### Vertical

Mounting height 1,5 m


(approx.)

1,300mm
(approx.)


1,5 m

(approx.)

Mounting height 1,3 m





#### Horizontal





◆ An area over a range of approx. 170° in a 500 mm radius from the camera displays. (The display range is a rough estimation and may change due to the installation environment.)


#### Zoom(Mounting height: 1,5 m)
















L			] [	950 IIIII (approx. )				1
DESCRIPTION		(Color,	FIG. NAME			UNIT	DATE	
VIDEO DOOR	STATION	Vandal-resistant)	WIRING	DIAGRAM/I	MAGE	mm	6 October,	2014
MODEL NO.			FIG. NO.		PAGE	REVISION		- A N P
JP-DVF			59745-	2–3	2/3	1	AIPH(	JNE

# ■ RESTRICTIONS


- JP-DVF door station is exclusively used with JP Series.
- Avoid to install JP-DVF in the following locations;



At the Entrance where background is sky in upper floors of Condominiums, etc.



The background of the standing caller's is white wall.



Where the standing location is strongly sunlit.

# **■**FUNCTIONS

• Initiating a call to and entering communication with Master station

DESCRIPTION	(Color,	FIG. NAME		UNIT	DATE
VIDEO DOOR STATION	Vandal-resistant)	RESTRICTIONS/FUN	ICTIONS	mm	6 October, 2014
MODEL NO.		FIG. NO.	PAGE	REVISION	AIBHANE
JP-DVF		59745-3-3	3/3	1	AIPHONE