



PRODUCT DRAWING

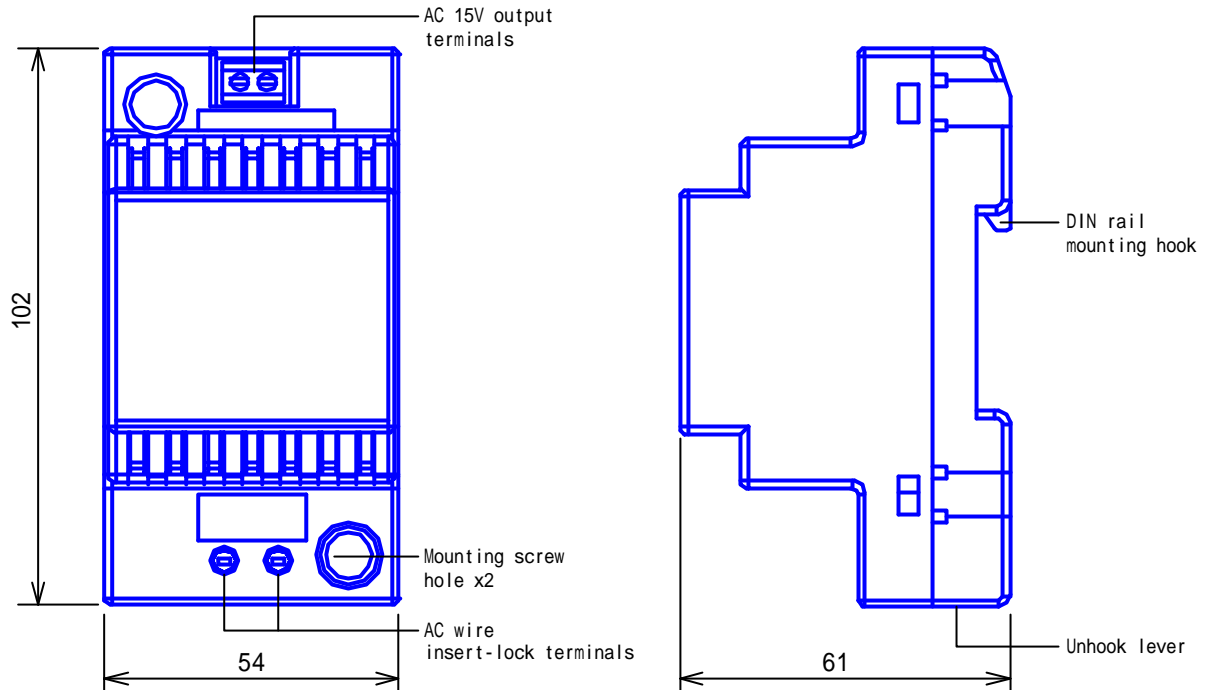

MOUNTING

PT-1211DR mounts on DIN rail.

WIRING DIAGRAM

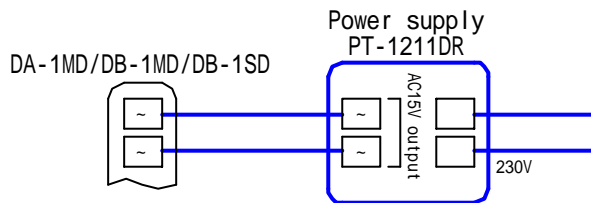

RESTRICTIONS

Power supply shall be located in an electrical enclosure, and connect to a breaker with a contact separation of at least 3mm in each pole (Less than 16A).

SPECIFICATIONS

Power source	230V AC, 50/60Hz.
Secondary output voltage	15V AC.
Secondary output current	700mA
Mounting	DIN rail mount, AC wire insert lock.
Housing	Fire-retardant ABS plastic
Weight	390g(approx.)
Unit color	White
Remarks	Exclusively used for each DA-1MD, DB-1MD and DB-1SD with DA door station w/1, 2 & 4 calls.

DESCRIPTION POWER SUPPLY(15V AC)	FIG. NAME PRODUCT/SPEC./RESTR.	UNIT mm	DATE 5 March, 2009
MODEL NO. PT-1211DR	FIG.NO. 52711-1-1	PAGE 1/1	REVISION 2

AIPHONE